


Model **SMP** Clutch/brake, shaft-mounted

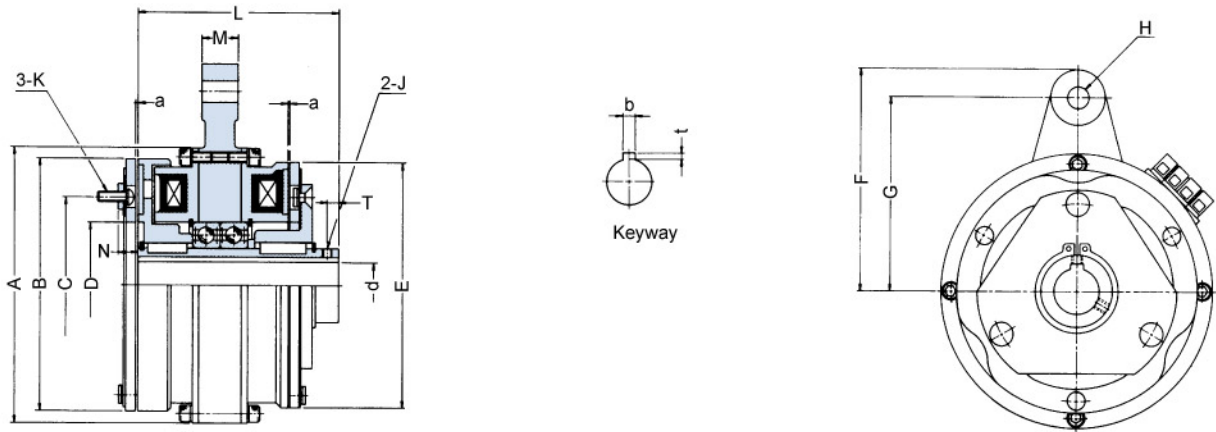

Dimensions in mm.

SIZE		2.5	5	10	20	40	
Static Torque	kgm	2.2	4.5	9	17	36	
Exciting Voltage	DC-V	24	24	24	24	24	
Capacity (at 20°C)	W	20	25	35	45	60	
Max. Revolution	RPM	5000	4000	3000	3000	2000	
Bore Shaft	Dia.	dH7	20	25	35	40	48
	keyway	bxt	5X2	7x3	10x3.5	10x3.5	12x3.5
Diameter	A	125	150	190	230	290	
	B	106	133	169	212	250	
	C	76	95	120	158	210	
	D	54	67	89	108	125	
	E	108	133	168	208	250	
	F	105	120	153	180	225	
	G	90	105	135	160	200	
	H	10	12	15	18	21	
	J	M5	M6	M8	M8	M10	
	K	M5	M6	M8	M10	M12	
Length	L	97	110	125	145	180	
	M	17	20	22	24	30	
	N	8.5	10.5	13	16.5	12	
	T	6	6	9	10	12	
Air Gap	a	0.2	0.3	0.3	0.4	0.5	
Weight	kg	3.8	4.7	10.2	18.5	40	